

RGL1 Fall arrest Lanyard

Accredited To: En354 & EN355

Web Material:25mm Polyester 40Kn


Fittings:Any Compatible EN362 Karabiners

Weight:0.4kg


Features: Fitted with shock absorber pack.

Max Fall Arrest Force < 6KN

RGK1 Karabiner Hook and RGK12

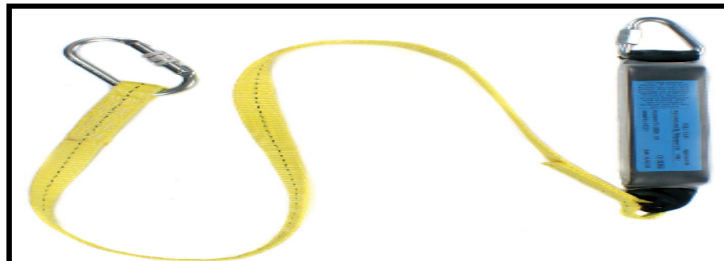

RGK11 Scaffold Hook and RGK12

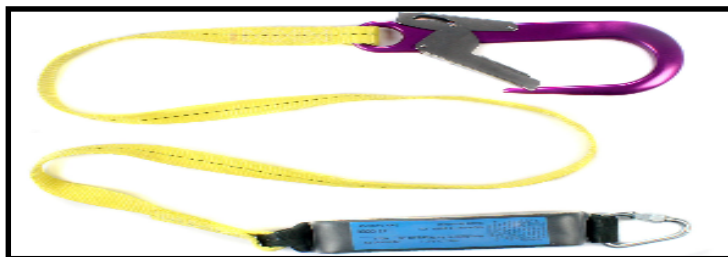

The RGL1 is supplied in two standard lengths:

1.3 M

1.8 M

The RGL1 lanyard is an industry standard, and normally the minimum equipment issued with a harness for working at height. We use 40KN Polyester Webbing to manufacture this product which helps give the product a longer life.

It is also treated with a water repellent coating which also extends the life of this product.

This lanyard should be used when the operative is working from a static position, connected to a fixed anchor point. If movement between anchorages is required, a twin leg lanyard should be used (**RGL3**), to provide constant protection.

Please ask for Configuration details as this product can be fitted with many different end components.

(For details of daily inspection procedures, see the info sheet)