

Duplex Webslings BS EN 1492-1

secutex® coated webslings

...the Powerflex, secuflex and secutex S2

the ultimate solution for lifting with sharp edges or abrasive surfaces!



Powerflex P2



Secuflex SX




Secutex® S2

secutex®

PowerS★T★A★R★ P2 coated with Powerflex

Highest abrasion-resistance

This sling can be used on rough surfaces, because of its Powerflex coating which has an extreme abrasion and tear-resistance.

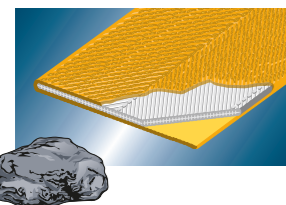

Improved eye reinforcement

Standard on all secutex slings


All secutex slings incorporate the advanced flock finish "intelligent" reinforcement with its extreme wear resistant fibres.

See page 8.

PowerS★T★A★R★ SX combined with a single secutex® coating

Secutex® - cut resistance plus wear-resistance


Two different coatings give a combination of the advantages: Polyurethane on the working side offers good cut-resistance, and the Powerflex coating on the back prevents abrasion.

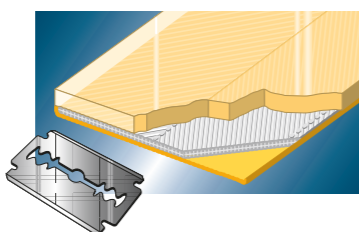

PowerS★T★A★R★ S2 coupled with a double coating secutex®

Complete cut resistance

A PowerS★T★A★R★ lifting sling with a two sided secutex® coating which offers extreme cut resistance on both sides.

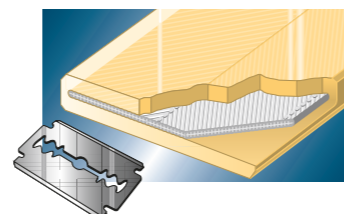

Ask for our specialist secutex brochure for further advice on lifting with sharp edges

TEXTILE SLINGS

TEXTILE SLINGS



P2

SX

S2

Technical Data	Colour Code WLL (kg)	Eye Width mm	Eye Length mm	EWL mm	Sling Width mm	Sling Thickness mm	Weight 1st mtr kg	Weight per extra mtr kg
Product								
PB 1000-P2	1.000	30	300	1.0	30	7	0.4	0.3
PB 2000-P2	2.000	35	300	1.0	60	7	1.0	0.6
PB 3000-P2	3.000	50	400	1.3	90	7	1.3	0.8
PB 4000-P2	4.000	65	400	1.3	120	7	1.8	1.1
PB 5000-P2	5.000	80	500	1.5	150	7	2.4	1.4
PB 6000-P2	6.000	70	700	1.9	180	7	3.0	1.7
PB 8000-P2	8.000	90	800	2.2	240	7	4.3	2.3
PB 10000-P2	10.000	160	1.000	2.6	300	7	7.2	2.8
PB 1000-SX	1.000	30	300	1.0	30	13	0.5	0.4
PB 2000-SX	2.000	35	300	1.0	60	13	1.2	0.8
PB 3000-SX	3.000	50	400	1.3	90	13	1.6	1.3
PB 4000-SX	4.000	65	400	1.3	120	13	2.2	1.8
PB 5000-SX	5.000	80	500	1.5	150	13	2.8	2.2
PB 6000-SX	6.000	70	700	1.9	180	13	3.3	2.7
PB 8000-SX	8.000	90	800	2.2	240	13	4.2	3.8
PB 10000-SX	10.000	160	1.000	2.6	300	13	6.8	4.8
PB 1000-S2	1.000	30	300	1.0	40	18	0.9	0.8
PB 2000-S2	2.000	35	300	1.0	70	18	1.4	1.4
PB 3000-S2	3.000	50	400	1.3	100	18	2.0	2.1
PB 4000-S2	4.000	65	400	1.3	130	18	2.7	2.9
PB 5000-S2	5.000	80	500	1.5	160	18	3.4	3.7
PB 6000-S2	6.000	70	700	1.9	190	18	3.8	4.4
PB 8000-S2	8.000	90	800	2.2	250	18	4.6	6.1
PB 10000-S2	10.000	160	1.000	2.6	310	18	7.0	7.6

P2

SX

S2

ORDERING INFORMATION
PB. 2000P2. 08
2000 kg Capacity Powerflex Coating 8m Length